

Job Name:	
Submitted By:	



Submittal Sheet For:	WT012GLSI25HLH / YN012GLSI25RPH
----------------------	--

Date _____

Ref. _____

Wall-Mounted Ductless 25SEER Inverter Heat Pump

System Full Set Model: **WYT012GLSI25RH**

AHRI Reference Number: **217048755**

Cooling Mode Performance

Rated Cooling	12,000 BTU/hr
Ambient Range	5°F ~ 131°F
SEER Rating	25 BTU/W·h
EER Rating	14 BTU/W·h

* 100% Capacity @ Indoor DB 80°F/WB 67°F

Heating Mode Performance

Rated Heating	12,000 BTU/hr
Ambient Range	-22°F ~ 86°F
HSPF2 IV (V)	10.5 (9.0) BTU/W·h
COP	4.0 (W/W)

* High Heat (47°F) = 12,000 BTU / Low Heat (17°F) = 7,500 BTU / COP (5°F) = 1.8



Wall-Mounted Indoor Unit



Outdoor Condensing Unit



Installation Kit (Pipe + Cable)



Handheld Remote Controller

Electrical Information

	Cooling	Heating
Rated Input (W)	970	925
Rated Current (A)	4.4	4.2
Breaker Needed	20A (Double-Pole)	
Power Supply	208~230V, 1Ph, 60Hz	

Piping and Refrigerant

Liquid Line (OD)	1/4"
Suction Line (OD)	3/8"
Refrigerant Precharge	R454b (Selectable Lineset)
Max Length/Height Diff.	50 ft. / 33 ft.

This combination is
Energy-Star certified.






Interior Unit (Air Handler) Specifications


Type	Heat Pump
Sound Level (dBA)	46 (Turbo) / 44 (Hi) / 36 (Med) / 32 (Lo) / 30 (Mute)
Auto Air Circulation	2-Way Louver (Up-Down + Left-Right)
Dimensions (WDH)	36"-1/4 x 7"-5/8 x 12"
Weight (lbs)	23.1


Exterior Unit (Condenser) Specifications

Sound Level (dBA)	57
Recommended Room Size	350~500 Sq. ft.
Minimum Room Size	40 Sq. ft.
Compressor	Inverter-Driven Rotary
Dimensions (WDH)	34" x 13"-3/4 x 23"-3/4
Weight (lbs)	69.4

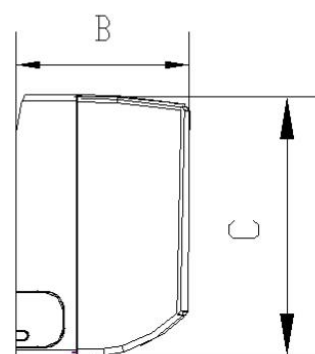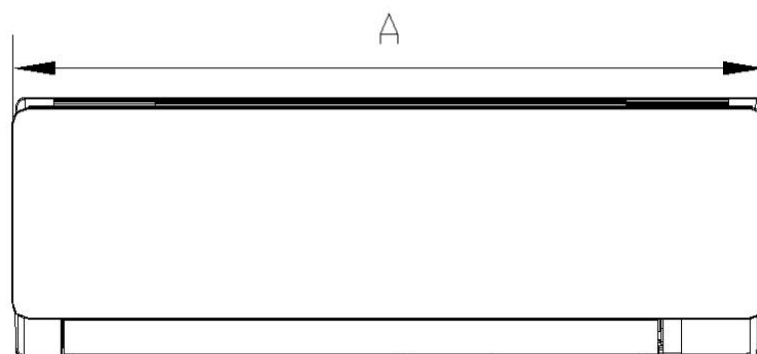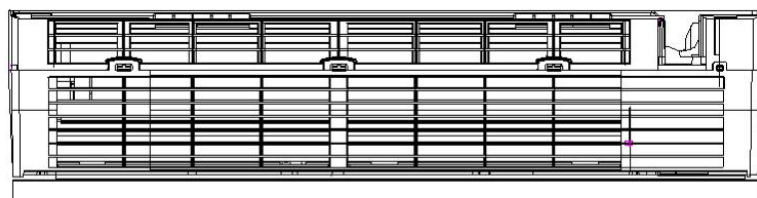


Model	A	B	C
WT012GLSI25HLH	920.8 mm 36-1/4"	193 mm 7-5/8"	304.8 mm 12"

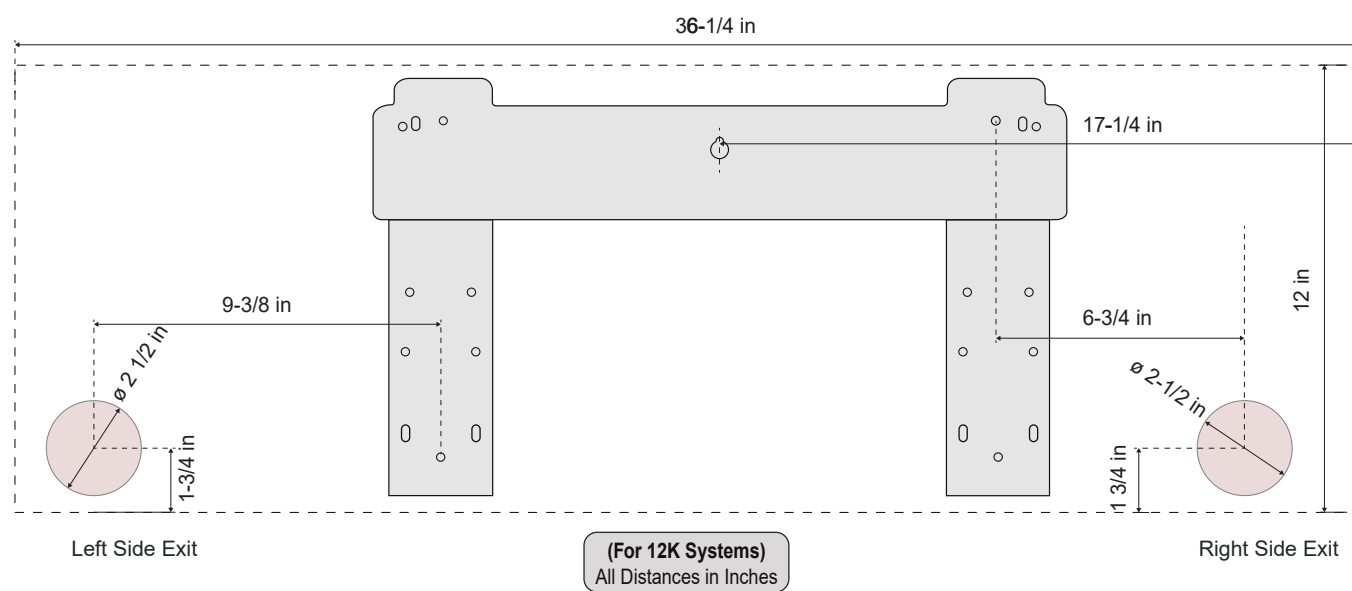


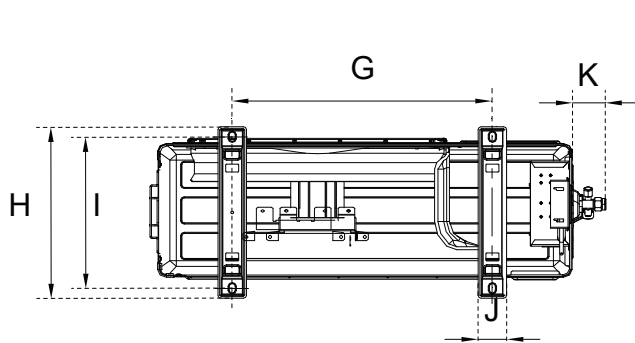

Underside View

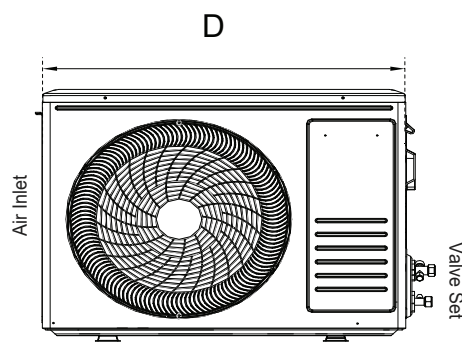

Front View



Side View

Model	D	E	F	G	H	I	J	K
YN012GLSI25RPH	794 mm	602 mm	288 mm	516 mm	349 mm	314 mm	54 mm	51 mm
	31-1/4"	23-3/4"	11-3/8"	20-3/8"	13-3/4"	12-3/8"	2-1/8"	2"

Warranty Information and Length



Complete warranty details are available with the vendor or online at <https://www.pdhvac.com/support/warranty/>. This high-quality system is eligible for up to a 5-year limited warranty on the compressor, and 5 years on other internal parts. To qualify for this warranty, the system must be installed within 90 days and registered properly. All other installations that are unregistered qualify for only 1-year parts/compressor warranty.

Outstanding Features

- LED Display
- Energy Saving
- Ultra-Thin Design
- Dual Drain Options
- Customizable Timer
- Eco-Friendly Refrigerant
- Whisper-Quiet Operation
- Power Loss Memory Recovery

Available Accessories

Part Number	Description
IKT-LCVR4P-KIT	<i>Decorative PVC Line Cover Kit</i>
IKT-LNBR-1/4-3/8	<i>BendAid Flexible Easy Bender Kit</i>
BRK-FRM-C-2P	<i>Folding Mounting Bracket w/ Leveler</i>
IKT-UVL32UL-AG	<i>UVC Bacterial Disinfection Kit</i>
IKT-SURPRK-DV2	<i>Ultimate Surge and Power Protection</i>